

STEREO VIDEOMIC PRO

Compact Stereo On-Camera Microphone

RØDE
MICROPHONES

Features

- Broadcast recording quality on-camera microphone
- Matched pair 1/2" condenser capsules in XY stereo configuration
- Ultra lightweight, compact form factor
- Two step High Pass Filter (flat, 75Hz)
- Three position level control (-10dB, 0, +20dB)
- 9V battery powered - over 100 hours use (alkaline)
- Integrated shock mounting
- Integrated foam windscreen
- 3.5mm stereo mini-jack output
- Billeted metal camera shoe mount with 3/8" thread for easy boompole mounting
- Designed and manufactured in Australia
- 10 year warranty*



Specifications

Acoustic Principle

Pressure Gradient

Frequency Range

40Hz ~ 20,000Hz
(selectable HPF@75Hz)

Output Impedance

200Ω

Maximum Output

+4.2dBu
(@ 1% THD into 1kΩ)

Maximum SPL

134dB (@ 1kHz, 1% THD into 1kΩ load)

Power Req.

9V alkaline battery

Output Connection

3.5mm stereo mini-jack

Directional Pattern

XY Cardioid (coincident)

Sensitivity

-38dB (12.6mV@94dB SPL)
±2dB re 1V/Pa @ 1kHz

Equivalent Noise

20dBA SPL
(A - weighted per IEC651)

Dynamic Range

100dB (per IEC651)

Signal/Noise

73dB SPL
(A - weighted per IEC651)


Dimensions

66mm × 108mm × 130mm
(2.6" × 4.25" × 5.1")


Net Weight

115g (0.25lb)

Frequency Response

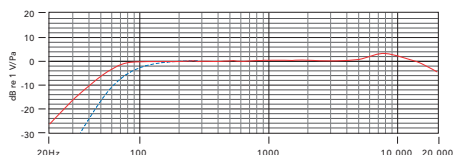

Polar Pattern

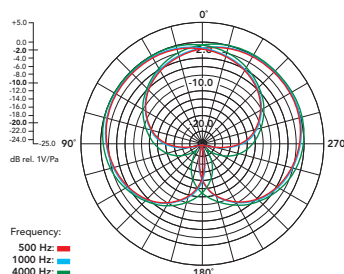

www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
6385 Rose Lane, Carpinteria CA 93013 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071